

**TOUR**

**i-LÈD**







A beam of light that returns to its starting point.


**TOUR.**






### Application versatility

Tour's development process created the product as an application solution capable of adapting to any architectural need. In the suspension version, the support cables are the same that power-supply the product and they come 5 metres long on the four dimensions. Lastly, thanks to the ceiling-mounted version and recess, Tour becomes a dynamic element provided with a clean design without interfering with the style it is made of.

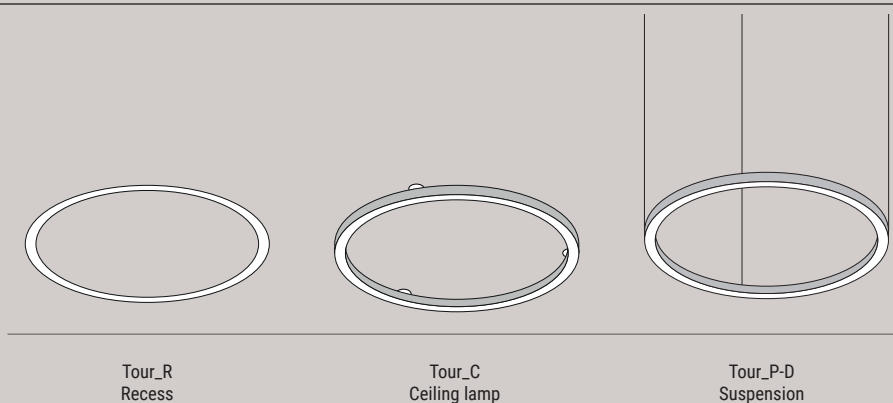


### The ring

Tour comes with an extruded aluminium profile which places it in a class of its own due to its almost imperceptible size. Due to its prestigious six finishes, Tour becomes a reasoned all-around element suitable for any architectural solution.

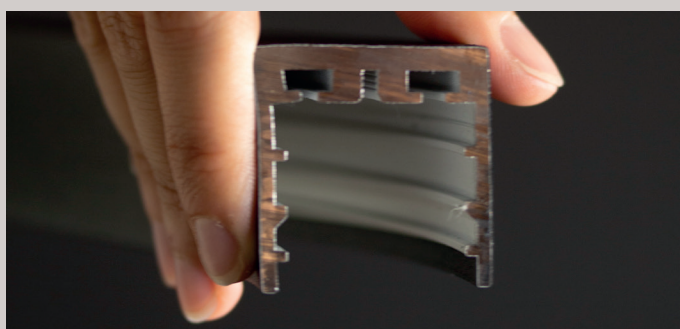

### Emissions range

Tour comes with four different emissions: direct, indirect, internal lateral and dual-side emission. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light sign.

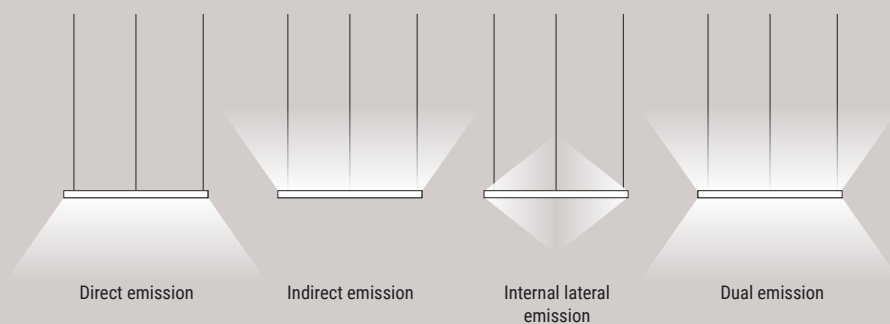

### Harmonic diffusion

The opaline polycarbonate screen guarantees visual comfort and a perfect diffusion. Is easily removable thanks to a system equipped with a spring, patented and specially designed to perfectly adapt to the extruded element.







BLACK - RAL 9005



GOLD



BRONZE







WHITE - RAL 9003



BRUSHED NICKEL




ROSE GOLD

### Single lighting remote driver configuration

Providing a Tour\_PD composition with DALI remote driver.


#### Selection Tour model

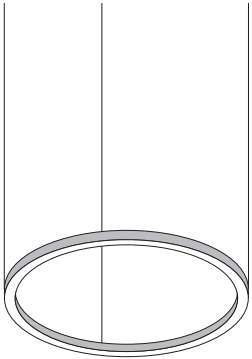

#### Selection suspension kit



#### Selection driver / controller



— driver ON/OFF




— Driver 0/1-10V



— Driver DALI

#### Final result

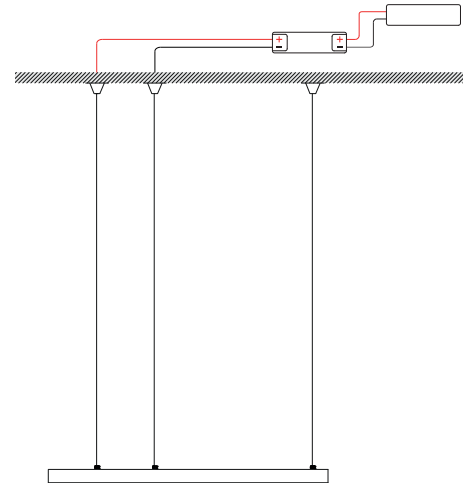

Driver:  
ON/OFF  
0/1-10V  
DALI


#### Ordering example:

n.1 art. 64570W00 (Tour\_PD1) + n.1 art. 64575 (Suspensions) + n.1 art. 99722 (Driver DALI)

### Dual lighting remote driver configuration

Providing a Tour\_D composition with DALI remote driver which commands dual lighting.


#### Selection Tour model

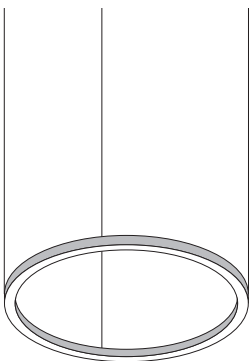

#### Selection suspension kit



#### Selection driver / controller



— driver ON/OFF




— Driver 0/1-10V



— Driver DALI

#### Final result

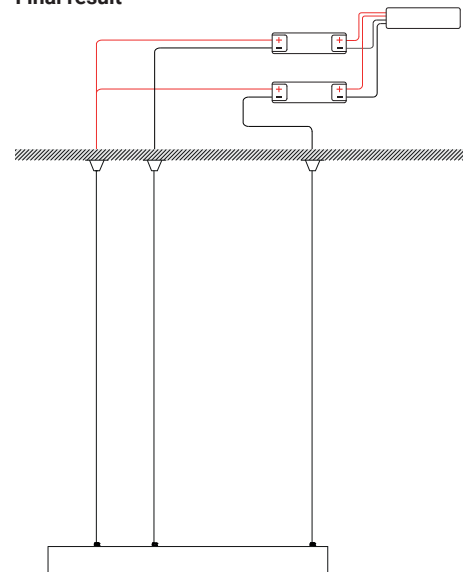


Driver:  
ON/OFF  
0/1-10V  
DALI

#### Ordering example:

n.1 art. 65312W00 (Tour\_D3) + n.1 art. 64575 (Suspensions) + n.2 art. 99722 (Driver DALI)

### 3 fixing kit Tour\_R



For version ø 2450 requires 2x fixing kit with 3 cones each

type

White 64575

Black 64670


Nickel 64671

Gold 63700

Bronze 64673

Rosegold 65141

### 4 fixing kit Tour\_Q



For version ø 2450 requires 2x fixing kit with 3 cones each

type

White 64270

Black 64240











### 3-coupling point ceiling rose for one-side emission Tour R

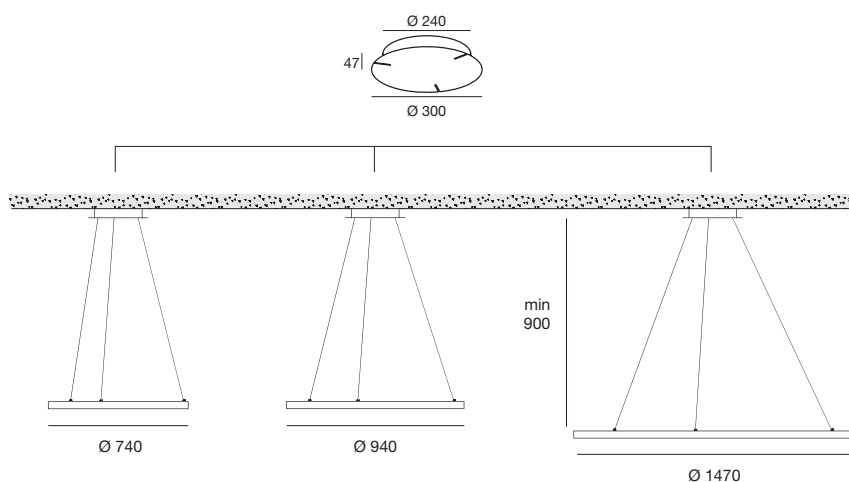

Available for PD1 - PI1 - PU1 - PD2 - PI2 - PU2 - PD3 - PI3 - PU3

type	ON/OFF Max 75 W	DALI 0/1-10 V Max 75 W
White	<b>64578</b>	<b>64586</b>
Black	<b>65142</b>	<b>65143</b>
Nickel	<b>65144</b>	<b>65145</b>
Gold	<b>63706</b>	<b>63707</b>
Bronze	<b>65148</b>	<b>65149</b>
Rose gold	<b>65150</b>	<b>65151</b>

### 4-coupling point ceiling rose for one-side emission Tour Q

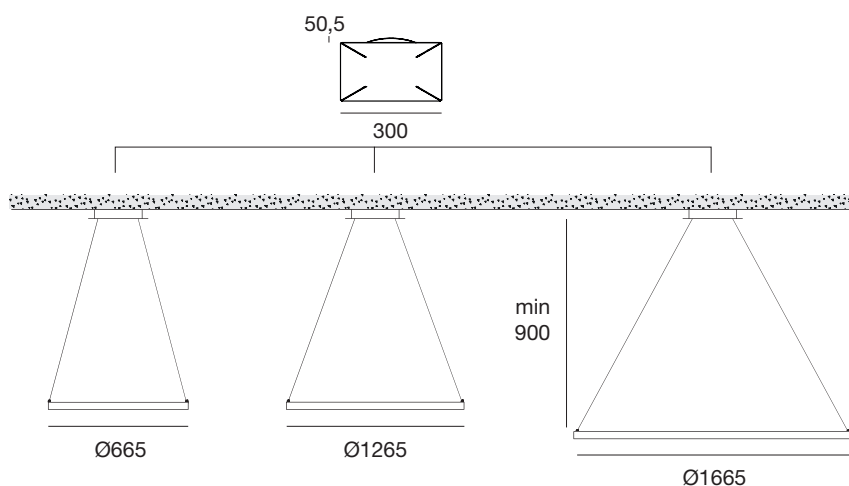


Available for one-side emission Tour Q

type	ON/OFF Max 75 W	DALI 0/1-10 V Max 75 W
White	<b>64368</b>	<b>64388</b>
Black	<b>64369</b>	<b>64389</b>

type	ON/OFF Max 150 W	DALI 0/1-10 V Max 150 W
White	<b>64378</b>	<b>64398</b>
Black	<b>64379</b>	<b>64399</b>

### 6-point coupling ceiling rose for 2450 mm-long one-side emission Tour R

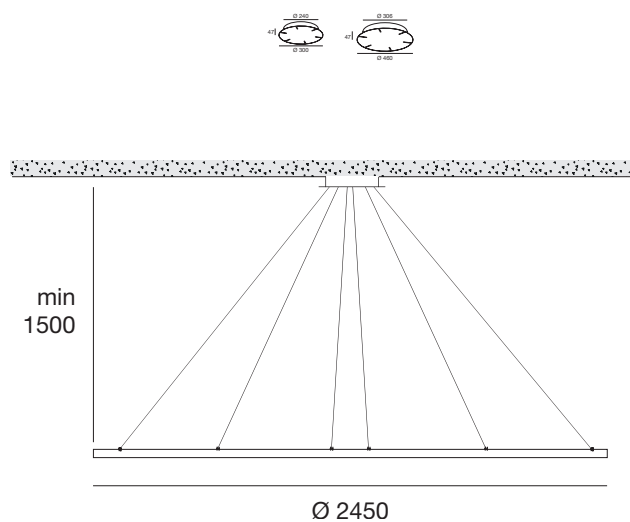

One side emission  
Available for PD4 - PU4

type	ON/OFF Max 150 W	DALI Max 150 W
White	<b>64580</b>	<b>64588</b>
Black	<b>65152</b>	<b>65153</b>
Nickel	<b>65154</b>	<b>65155</b>
Gold	<b>63708</b>	<b>63709</b>
Bronze	<b>65158</b>	<b>65159</b>
Rose gold	<b>65160</b>	<b>65161</b>








### Configuration of Tour\_C with spacer kit

Providing an ON/OFF composition. Tour\_CI, CD with spacer kit. Tour\_C is distributed including 23 mm spacers which can be possibly replaced by the suspension kit to extend the distance from the ceiling.


#### Selection Tour model




#### Selection suspension kit



#### Selection driver / controller

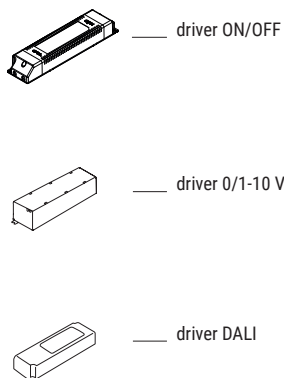

#### Final result

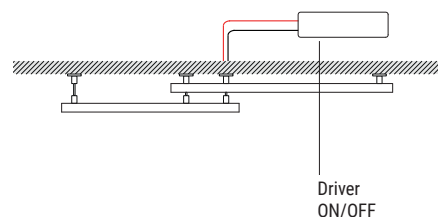


#### Ordering example:

n.1 art. 65368W00 + n.1 art. 65386 (spacer kit) + n.1 art. 99374 (driver ON/OFF)  
 n.1 art. 65356W00


### Recess Tour configuration

Providing an ON/OFF configuration with Tour\_R.


#### Selection Tour model



#### Selection driver / controller

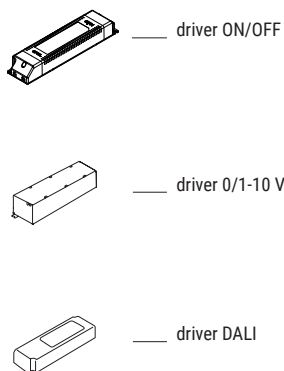

#### Final result

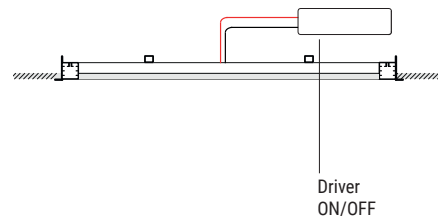

#### Ordering example:

n.1 art. 65420W00 + n.1 art. 99374 (driver ON/OFF)










































						
<b>665 x 665 mm</b>	-	Q - QV 45 W	-	90 W	-	-
<b>740 mm</b>	PD - PU 37,5 W	-	75 W	-	37,5 W	37,5 W
<b>750 mm</b>	PI 29 W	-	-	-	-	-
<b>910 mm</b>	PD - PU 45 W	-	90 W	-	-	-
<b>940 mm</b>	-	-	-	-	45 W	-
<b>945 mm</b>	PI 36,5 W	-	-	-	-	36,5 W
<b>1265 x 1265 mm</b>	-	Q 90 W	-	180 W	-	-
<b>1430 mm</b>	PD 70 W	-	140 W	-	-	-
<b>1470 mm</b>	-	-	-	-	70 W	-
<b>1475 mm</b>	PI 57,5 W	-	-	-	-	57,5 W
<b>1665 x 1265 mm</b>	-	Q 105 W	-	210 W	-	-
<b>2450 mm</b>	PD - PU 114 W	-	224 W	-	-	-
<b>Finish</b>						
<b>CRI 92</b>	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K
<b>Emission</b>						
<b>Driver</b>	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI

Tour\_PD | Pendant Luminares | 24 V | topLED 37,5 W



White	<b>64570</b>	3000 K	4678 lm	<b>W</b>	General	<b>00</b>
Black	<b>65112</b>	4000 K	5006 lm	<b>N</b>		
Nickel	<b>65113</b>					
Gold	<b>63726</b>					
Bronze	<b>65115</b>					
Rosegold	<b>65128</b>					

Electronics





<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 - 2 art.	1 - 4 art.	1 - 3 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Direct emission

Tour\_PD | Pendant Luminares | 24 V | topLED 45 W

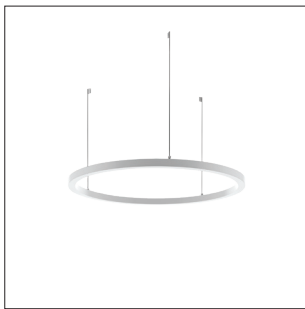

White	<b>64571</b>	3000 K	5847 lm	<b>W</b>	General	<b>00</b>
Black	<b>65116</b>	4000 K	6139 lm	<b>N</b>		
Nickel	<b>65117</b>					
Gold	<b>63727</b>					
Bronze	<b>65119</b>					
Rosegold	<b>65129</b>					

Electronics




<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 3 art.	1 - 2 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Direct emission

Tour\_PD | Pendant Luminares | 24 V | topLED 70 W



White	<b>64572</b>	3000 K	9355 lm	<b>W</b>	General	<b>00</b>
Black	<b>65120</b>	4000 K	9823 lm	<b>N</b>		
Nickel	<b>65121</b>					
Gold	<b>63728</b>					
Bronze	<b>65123</b>					
Rosegold	<b>65130</b>					

Electronics




<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 2 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Direct emission

Tour\_PD | Pendant Luminares | 24 V | topLED 114 W

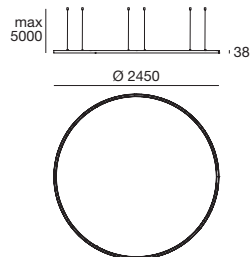

White	<b>64573</b>	3000 K	15588 lm	<b>W</b>	General	<b>00</b>
Black	<b>65124</b>	4000 K	16367 lm	<b>N</b>		
Nickel	<b>65125</b>					
Gold	<b>63729</b>					
Bronze	<b>65127</b>					
Rosegold	<b>65131</b>					

Electronics



<b>99331</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 art.	1 art.



**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories

Direct emission






Tour\_PI | Pendant Luminaires | 24 V | stripLED 29 W



White	<b>64577</b>	3000 K	3000 lm	<b>W</b>	General	<b>00</b>
Black	<b>65100</b>	4000 K	3220 lm	<b>N</b>		
Nickel	<b>65101</b>					
Gold	<b>63736</b>					
Bronze	<b>65103</b>					
Rosegold	<b>65132</b>					

Electronics




<b>99374</b> ON/OFF 1 - 2 art.	<b>99332</b> 0/1-10V 1 - 5 art.	<b>99722</b> DALI 1 - 4 art.
--------------------------------------	---------------------------------------	------------------------------------

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Internal side emission

Tour\_PI | Pendant Luminaires | 24 V | stripLED 36,5 W



White	<b>64579</b>	3000 K	3785 lm	<b>W</b>	General	<b>00</b>
Black	<b>65104</b>	4000 K	4060 lm	<b>N</b>		
Nickel	<b>65105</b>					
Gold	<b>63737</b>					
Bronze	<b>65107</b>					
Rosegold	<b>65133</b>					

Electronics




<b>99374</b> ON/OFF 1 - 2 art.	<b>99332</b> 0/1-10V 1 - 4 art.	<b>99722</b> DALI 1 - 3 art.
--------------------------------------	---------------------------------------	------------------------------------

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Internal side emission

Tour\_PI | Pendant Luminaires | 24 V | stripLED 57,5 W



White	<b>64581</b>	3000 K	6000 lm	<b>W</b>	General	<b>00</b>
Black	<b>65108</b>	4000 K	6440 lm	<b>N</b>		
Nickel	<b>65109</b>					
Gold	<b>63738</b>					
Bronze	<b>65111</b>					
Rosegold	<b>65134</b>					

Electronics





<b>99374</b> ON/OFF 1 art.	<b>99332</b> 0/1-10V 1 - 2 art.	<b>99722</b> DALI 1 - 2 art.
----------------------------------	---------------------------------------	------------------------------------

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Internal side emission

Tour\_PU | Pendant Luminares | 24 V | topLED 37,5 W



White	<b>64583</b>	3000 K	4678 lm	<b>W</b>	General	<b>00</b>
Black	<b>64682</b>	4000 K	5006 lm	<b>N</b>		
Nickel	<b>64683</b>					
Gold	<b>63731</b>					
Bronze	<b>64685</b>					
Rosegold	<b>65135</b>					

Electronics





<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 - 2 art.	1 - 4 art.	1 - 3 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories




Indirect emission

Tour\_PU | Pendant Luminares | 24 V | topLED 45 W

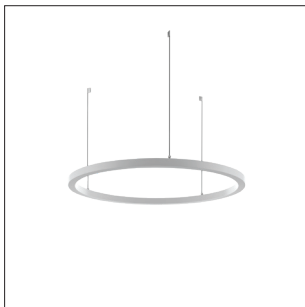

White	<b>64584</b>	3000 K	5847 lm	<b>W</b>	General	<b>00</b>
Black	<b>64686</b>	4000 K	6139 lm	<b>N</b>		
Nickel	<b>64687</b>					
Gold	<b>63732</b>					
Bronze	<b>64689</b>					
Rosegold	<b>65136</b>					

Electronics





<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 3 art.	1 - 2 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories




Indirect emission

Tour\_PU | Pendant Luminares | 24 V | topLED 70 W

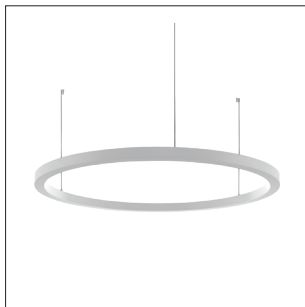

White	<b>64585</b>	3000 K	9355 lm	<b>W</b>	General	<b>00</b>
Black	<b>64690</b>	4000 K	9823 lm	<b>N</b>		
Nickel	<b>64691</b>					
Gold	<b>63733</b>					
Bronze	<b>64693</b>					
Rosegold	<b>65137</b>					

Electronics





<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 2 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories




Indirect emission

Tour\_PU | Pendant Luminares | 24 V | topLED 114 W

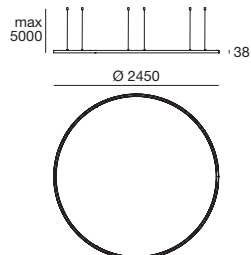

White	<b>64587</b>	3000 K	15588 lm	<b>W</b>	General	<b>00</b>
Black	<b>64694</b>	4000 K	16367 lm	<b>N</b>		
Nickel	<b>64695</b>					
Gold	<b>63734</b>					
Bronze	<b>64697</b>					
Rosegold	<b>65138</b>					

Electronics



<b>99331</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories



Indirect emission





Tour\_R | Integrated Luminaires | 24 V | topLED 37,5 W




742

• 38



White	<b>65420</b>	3000 K	4678 lm	<b>W</b>	General	<b>00</b>
Black	<b>65421</b>	4000 K	5006 lm	<b>N</b>		
Nickel	<b>65422</b>					
Gold	<b>63710</b>					
Bronze	<b>65424</b>					
Rosegold	<b>65425</b>					

Electronics



<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 - 2 art.	1 - 4 art.	1 - 3 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories

Direct emission

Tour\_R | Integrated Luminaires | 24 V | topLED 45 W




912

• 38



White	<b>65426</b>	3000 K	5847 lm	<b>W</b>	General	<b>00</b>
Black	<b>65427</b>	4000 K	6139 lm	<b>N</b>		
Nickel	<b>65428</b>					
Gold	<b>63720</b>					
Bronze	<b>65430</b>					
Rosegold	<b>65431</b>					

Electronics




<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 3 art.	1 - 2 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Direct emission

Tour\_R | Integrated Luminaires | 24 V | topLED 70 W




1432

• 38



White	<b>65432</b>	3000 K	9355 lm	<b>W</b>	General	<b>00</b>
Black	<b>65433</b>	4000 K	9823 lm	<b>N</b>		
Nickel	<b>65434</b>					
Gold	<b>63730</b>					
Bronze	<b>65436</b>					
Rosegold	<b>65437</b>					

Electronics




<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 2 art.	1 art.


**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories

Direct emission

EPS lid removal steps

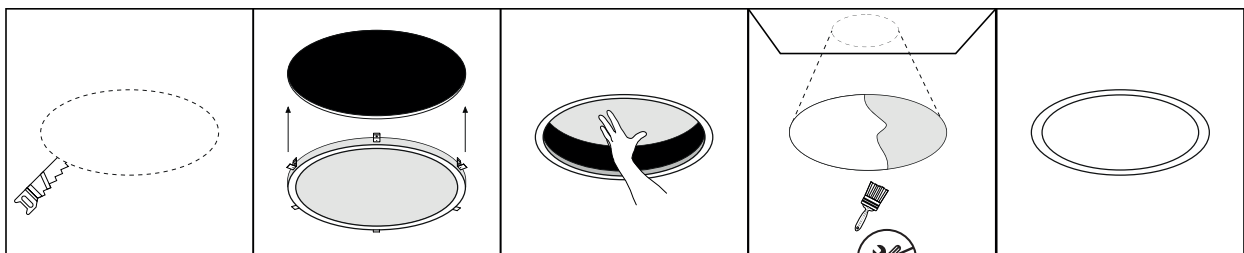


Tour\_CD | Ceiling Light | 24 V | topLED 37,5 W



White	<b>65350</b>	3000 K	4678 lm	<b>W</b>	General	<b>00</b>
Black	<b>65351</b>	4000 K	5006 lm	<b>N</b>		
Nickel	<b>65352</b>					
Gold	<b>63740</b>					
Bronze	<b>65354</b>					
Rosegold	<b>65355</b>					

Electronics




<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 - 2 art.	1 - 4 art.	1 - 3 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories




Direct emission

Tour\_CD | Ceiling Light | 24 V | topLED 45 W



White	<b>65356</b>	3000 K	5847 lm	<b>W</b>	General	<b>00</b>
Black	<b>65357</b>	4000 K	6139 lm	<b>N</b>		
Nickel	<b>65358</b>					
Gold	<b>63750</b>					
Bronze	<b>65360</b>					
Rosegold	<b>65361</b>					

Electronics





<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 3 art.	1 - 2 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories




Direct emission

Tour\_CD | Ceiling Light | 24 V | topLED 70 W



White	<b>65362</b>	3000 K	9355 lm	<b>W</b>	General	<b>00</b>
Black	<b>65363</b>	4000 K	9823 lm	<b>N</b>		
Nickel	<b>65364</b>					
Gold	<b>63760</b>					
Bronze	<b>65366</b>					
Rosegold	<b>65367</b>					

Electronics





<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 2 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories



Direct emission

Spacer kit for Tour\_C




White	<b>65386</b>
Black	<b>65387</b>
Nickel	<b>65389</b>
Gold	<b>63724</b>
Bronze	<b>65390</b>
Rosegold	<b>65391</b>

The Tour\_C version comes with 23 mm-long spacers included.






## Tour\_CI | Ceiling\_Wall Light | 24 V | stripLED 29 W




White	<b>65368</b>	3000 K	3000 lm	<b>W</b>	General	<b>00</b>
Black	<b>65369</b>	4000 K	3220 lm	<b>N</b>		
Nickel	<b>65370</b>					
Gold	<b>63721</b>					
Bronze	<b>65372</b>					
Rosegold	<b>65373</b>					


## Electronics



**99374**  
ON/OFF  
1 - 2 art.



**99332**  
0/1-10V  
1 - 5 art.





**99722**  
DALI  
1 - 4 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation  
accessories




Internal side emission

## Tour\_CI | Ceiling\_Wall Light | 24 V | stripLED 36,5 W




White	<b>65374</b>	3000 K	3785 lm	<b>W</b>	General	<b>00</b>
Black	<b>65375</b>	4000 K	4060 lm	<b>N</b>		
Nickel	<b>65376</b>					
Gold	<b>63722</b>					
Bronze	<b>65378</b>					
Rosegold	<b>65379</b>					


## Electronics



**99374**  
ON/OFF  
1 - 2 art.



**99332**  
0/1-10V  
1 - 4 art.




**99722**  
DALI  
1 - 3 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation  
accessories




Internal side emission

## Tour\_CI | Ceiling\_Wall Light | 24 V | stripLED 57,5 W




White	<b>65380</b>	3000 K	6000 lm	<b>W</b>	General	<b>00</b>
Black	<b>65381</b>	4000 K	6440 lm	<b>N</b>		
Nickel	<b>65382</b>					
Gold	<b>63723</b>					
Bronze	<b>65384</b>					
Rosegold	<b>65385</b>					


## Electronics



**99374**  
ON/OFF  
1 art.



**99332**  
0/1-10V  
1 - 2 art.





**99722**  
DALI  
1 - 2 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation  
accessories



Internal side emission



## Spacer kit for Tour\_C



White	<b>65386</b>
Black	<b>65387</b>
Nickel	<b>65389</b>
Gold	<b>63724</b>
Bronze	<b>65390</b>
Rosegold	<b>65391</b>


The Tour\_C version  
comes with 23 mm-long  
spacers included.

Tour\_D | Pendant Luminaires | 24 V | topLED 75 W



White	<b>65300</b>	3000 K	9356 lm	<b>W</b>	General	<b>00</b>
Black	<b>65301</b>	4000 K	10012 lm	<b>N</b>		
Nickel	<b>65302</b>					
Gold	<b>63711</b>					
Bronze	<b>65304</b>					
Rosegold	<b>65305</b>					

Electronics




<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 - 2 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Biemission

Tour\_D | Pendant Luminaires | 24 V | topLED 90 W



White	<b>65306</b>	3000 K	11894 lm	<b>W</b>	General	<b>00</b>
Black	<b>65307</b>	4000 K	12278 lm	<b>N</b>		
Nickel	<b>65308</b>					
Gold	<b>63712</b>					
Bronze	<b>65310</b>					
Rosegold	<b>65311</b>					

Electronics





<b>99331</b>	<b>99332</b>	<b>99722</b>
ON/OFF	0/1-10V	DALI
1 art.	1 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Biemission

Tour\_D | Pendant Luminaires | 24 V | topLED 140 W



White	<b>65312</b>	3000 K	18710 lm	<b>W</b>	General	<b>00</b>
Black	<b>65313</b>	4000 K	19646 lm	<b>N</b>		
Nickel	<b>65314</b>					
Gold	<b>63713</b>					
Bronze	<b>65316</b>					
Rosegold	<b>65317</b>					

Electronics





<b>99331</b>	<b>99332</b>	<b>99787</b>
ON/OFF	0/1-10V	DALI
1 art.	1 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Biemission

Tour\_D | Pendant Luminaires | 24 V | topLED 224 W

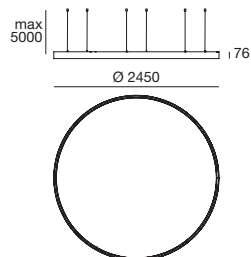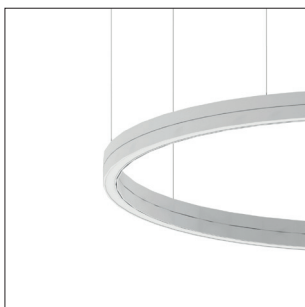

White	<b>65318</b>	3000 K	31176 lm	<b>W</b>	General	<b>00</b>
Black	<b>65319</b>	4000 K	32734 lm	<b>N</b>		
Nickel	<b>65320</b>					
Gold	<b>63714</b>					
Bronze	<b>65322</b>					
Rosegold	<b>65323</b>					

Electronics



<b>99786</b>	<b>99787</b>
ON/OFF	DALI
1 art.	1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories



Biemission








Tour\_Q | Pendant Luminaires | 24 V | topLED 45 W

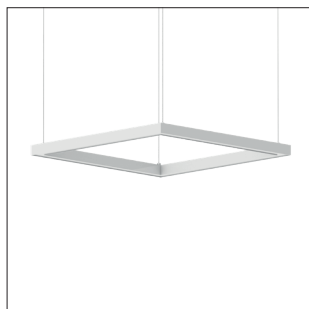

White	<b>64360</b>	3000 K	4810 lm	<b>W</b>	General	<b>00</b>
Black	<b>64370</b>	4000 K	5040 lm	<b>N</b>		

Electronics





<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF 1 art.	0/1-10V 1 - 3 art.	DALI 1 - 2 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Direct emission

Tour\_Q | Pendant Luminaires | 24 V | topLED 90 W



White	<b>64361</b>	3000 K	9619 lm	<b>W</b>	General	<b>00</b>
Black	<b>64371</b>	4000 K	10080 lm	<b>N</b>		

Electronics





<b>99331</b>	<b>99332</b>	<b>99722</b>
ON/OFF 1 art.	0/1-10V 1 art.	DALI 1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Direct emission

Tour\_Q | Pendant Luminaires | 24 V | topLED 105 W



White	<b>64362</b>	3000 K	11222 lm	<b>W</b>	General	<b>00</b>
Black	<b>64372</b>	4000 K	11760 lm	<b>N</b>		

Electronics





<b>99331</b>	<b>99332</b>	<b>99722</b>
ON/OFF 1 art.	0/1-10V 1 art.	DALI 1 art.

**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories


Direct emission

Tour\_QV | Pendant Luminaires | 24 V | topLED 45 W



White	<b>64260</b>	3000 K	4810 lm	<b>W</b>	General	<b>00</b>
Black	<b>64250</b>	4000 K	5040 lm	<b>N</b>		

Electronics



<b>99374</b>	<b>99332</b>	<b>99722</b>
ON/OFF 1 art.	0/1-10V 1 - 3 art.	DALI 1 - 2 art.


**PAGE 8 DALI**  
**PAGE 31 on/off**  
Installation accessories

Direct emission





Tour\_QD | Pendant Luminaires | 24 V | topLED 90 W




White	<b>64363</b>	3000 K	9619 lm	<b>W</b>	General	<b>00</b>
Black	<b>64373</b>	4000 K	10080 lm	<b>N</b>		

Electronics

<b>99331</b> ON/OFF 1 art.	<b>99332</b> 0/1-10V 1 art.	<b>99722</b> DALI 1 art.

PAGE 8 DALI  
PAGE 31 on/off  
Installation accessories

Tour\_QD | Pendant Luminaires | 24 V | topLED 180 W




White	<b>64364</b>	3000 K	18437 lm	<b>W</b>	General	<b>00</b>
Black	<b>64374</b>	4000 K	19320 lm	<b>N</b>		

Electronics

<b>99786</b> ON/OFF 1 art.	<b>99787</b> DALI 1 art.

PAGE 8 DALI  
PAGE 31 on/off  
Installation accessories

Tour\_QD | Pendant Luminaires | 24 V | topLED 210 W



White	<b>64365</b>	3000 K	21643 lm	<b>W</b>	General	<b>00</b>
Black	<b>64375</b>	4000 K	22680 lm	<b>N</b>		

Electronics

<b>99786</b> ON/OFF 1 art.	<b>99787</b> DALI 1 art.

PAGE 8 DALI  
PAGE 31 on/off  
Installation accessories









## Configuration with 2450 dual-side emission central ceiling rose

Providing a Tour\_D composition with ON / OFF or DALI central ceiling rose.


### Selection Tour model



### Selection of central ceiling rose



### Final result

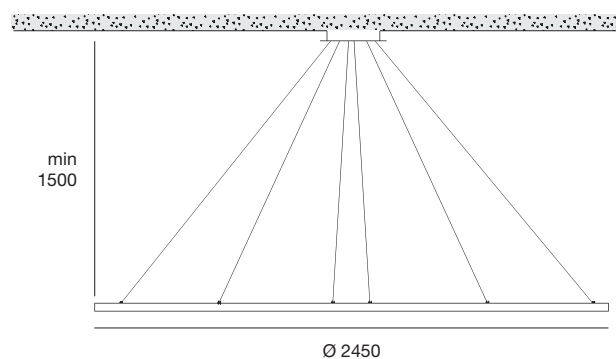


### Ordering example:

n.1 art. 64570W00  
(Tour\_PD1)

+


n.1 art. 64578  
(ON/OFF)

## Coupling ceiling rose for dual-side emission Tour R



Available for D1-D2-D3


type	ON/OFF Max 75+75 W	DALI Max 75+75 W
White	<b>65324</b>	<b>65325</b>
Black	<b>65326</b>	<b>65327</b>
Nickel	<b>65328</b>	<b>65329</b>
Gold	<b>63701</b>	<b>63702</b>
Bronze	<b>65332</b>	<b>65333</b>
Rosegold	<b>65334</b>	<b>65335</b>



Available for D4


type	ON/OFF Max 150+150 W	DALI Max 150+150 W
White	<b>65336</b>	<b>65337</b>
Black	<b>65338</b>	<b>65339</b>
Nickel	<b>65340</b>	<b>65341</b>
Gold	<b>63703</b>	<b>63704</b>
Bronze	<b>65344</b>	<b>65345</b>
Rosegold	<b>65346</b>	<b>65347</b>

## Coupling ceiling rose for dual-side emission Tour Q



Available for dual-side emission Tour Q

type	ON/OFF Max 75 W + 75 W	DALI 0/1-10 V Max 75 W + 75 W
White	<b>64358</b>	<b>64348</b>
Black	<b>64359</b>	<b>64349</b>



Available for dual-side emission Tour Q

type	ON/OFF Max 150 W + 150 W	DALI 0/ -10 V Max 150 W + 150 W
White	<b>64338</b>	<b>64328</b>
Black	<b>64339</b>	<b>64329</b>







### Configuration with central ceiling rose for compositions

Providing a Tour\_PD, PU and D composition with central ceiling rose ON / OFF.


#### Selection Tour model

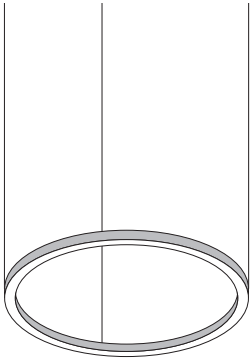

#### Selection of central ceiling rose



#### Final result

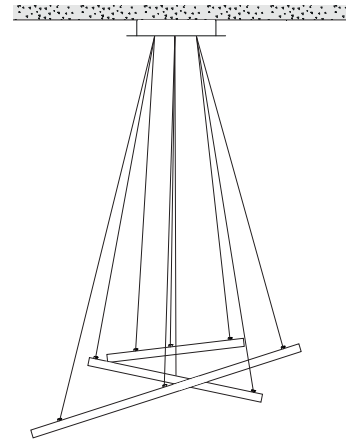



#### Ordering example:

n.1 art. 64570W00  
n.1 art. 64584W00  
n.1 art. 65312W00

+


n.1 art. 65412  
(ON/OFF)

### 6-point ceiling rose for 3 tour fixing

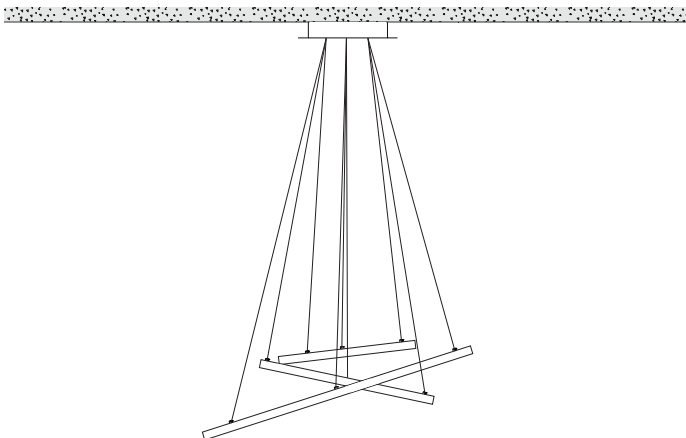

type	ON/OFF Max 450 W	DALI Max 450 W
White	<b>65412</b>	<b>65418</b>
Black	<b>65413</b>	<b>65419</b>
Nickel	<b>65414</b>	<b>65398</b>
Gold	<b>63716</b>	<b>63717</b>
Bronze	<b>65416</b>	<b>65349</b>
Rose gold	<b>65417</b>	<b>65399</b>


### Reson\_150 | On/Off Driver



range	output	input	eff.	PF	surge	
1-150 W stripLED	6.25A 24V	190~250V AC	95%	0.98	5 kV	<b>99331</b>
1-150 W topLED						

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF.


### Reson\_150 | 0/1-10V Driver



range	output	input	eff.	PF	surge	
1-150 W stripLED	6.25A 24V	190~250V AC	95%	0.98	5 kV	<b>99332</b>
1-150 W topLED			95%	0.98	5 kV	

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF. Adjustment via 0/1-10V interface or potentiometer.

### Reson\_75 | On/Off Driver




range	output	input	eff.	PF	surge	
1-75 W stripLED	3.13A 24V	190~250V AC	91%	0.96	4 kV	<b>99374</b>
1-75 W topLED						

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF.






Mean | DALI Driver



range	output	input	eff.	PF	surge
1-120 W stripLED	5A 24V	190~250V AC	90%	0.9C	2 kV
					<b>99722</b>

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Mean | On/Off Driver



range	output	input	eff.	PF	surge
1-240 W stripLED	10A 24V	100~240V AC	92%	0.95	2 kV
1-240 W topLED					
					<b>99786</b>

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against the open circuit and the short-circuit along the output line.

Mean | DALI Driver



range	output	input	eff.	PF	surge
1-240 W stripLED	10A 24V	100~240V AC	92%	0.95	2 kV
1-240 W topLED					
					<b>99787</b>

Suitable for powering LED strips and 5 mm constant voltage LEDs. Adjustment via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

# linea light address

## Linea Light HQ Italy

via della Fornace, 59 z.i.  
31023 Castelfranco di Resana (TV) - Italy  
Phone: +39 0423 7868  
Fax: +39 0423 786900  
info@linealight.com

## LightVillage Milano

Exhibition Area Only  
via Morimondo, 26 int. 17G  
20143 Milano - Italy  
Phone: +39 02 36750915  
Fax: +39 02 36750915  
milano@lightvillage.it

## Linea Light Roma

Via Stendhal, 22  
00144 Roma - Italy  
Phone: +39 06 5935106  
info@linealightroma.com

## Linea Light UK

Suite 109 - Business Design Centre  
52 Upper Street - Islington N10QH  
London - UK  
Phone: +44 0203 6371983  
info@linealight-uk.com

## Linea Light France

Z.A. Heiden Est, 12 rue des Pays-Bas  
68310 Wittelsheim - France  
Phone: +33 389 75 52 23  
Fax: +33 389 75 59 07  
info@linealight.fr

## Linea Light Deutschland

Aktienstraße 214  
45473 Mülheim a.d. Ruhr - Germany  
Phone: +49 208 299979-0  
Fax: +49 208 299979-10  
service@linealight.de

## Linea Light Polska

ul. Wiosenna, 47  
41253 Czeladz - Poland  
Phone: +48 32 760 98 71  
Fax: +48 32 760 98 76  
biuro@linealight.com.pl

## Linea Light Russia

Luzhnetskaya nab., 2/4, str. 3, of. 304  
119270 Moscow - Russian Federation  
Phone: +7 495 639 99 41  
info@linealight.ru

## Linea Light Spain

C/ Longares, 48  
28022 Madrid - Spain  
Phone: +34 653 881 578  
info@linealighth.es

## Linea Light USA - Inter Lux

3741 Commerce Drive  
Suites 306-308  
Baltimore, MD 21227 - USA  
Phone: +1 410 381 1497  
Fax: +1 410 381 1589  
answers@inter-lux.com

## Linea Light GCC

Jumeirah Lake Towers  
JBC2 - 35th Floor Office 02 - Dubai - UAE  
P.O. Box 125902  
Phone: +971 4 4218275  
Fax: +971 4 4218274  
info@linealight.ae

## Linea Light Asia - Pacific

N.7 Nanyi Huayuan Road Industry Avenue  
528478 Xiaolan Town - Zhongshan City  
Guangdong Province - China  
Phone: +86 760 87618355  
Fax: +86 760 87553990  
info@linealight.cn

## Linea Light Singapore

21 Kaki Bukit Place, 5th Fl.  
Eunos Techpark Singapore  
416199 Singapore  
Phone: +65-6908 5758  
info.sg@linealight.com

## Art direction

Linea Light Group Marketing Dept.

## Printed in Italy

April 2019







**Your Light** | Future Proof